


Back To Back Deep Channel Slotted

Part Code	Length (m)	Finish
UC4182S/3	3	Galvanized to BS EN10346
UC4182S/6	6	Galvanized to BS EN10346
GMUC4182S/3	3	Hot Dipped to BS EN ISO 1461
GMUC4182S/6	6	Hot Dipped to BS EN ISO 1461



Part Code	0.50	0.75	1.00	1.50	2.00	2.50	3.00
Deflection at load *mm	0.50	1.10	2.00	4.60	8.20	12.80	18.40
Safe UDL **kg	2372	1579	1186	784	583	462	380



Deep Channel Triple Slotted

Part Code	Length (m)	Finish
UC4141T/3	3	Galvanized to BS EN10346
UC4141T/6	6	Galvanized to BS EN10346
GMUC4141T/3	3	Hot Dipped to BS EN ISO 1461
GMUC4141T/6	6	Hot Dipped to BS EN ISO 1461



Span (m)	0.50	0.75	1.00	1.50	2.00	2.50	3.00
Deflection at load *mm	0.50	1.10	2.00	4.60	8.20	12.80	18.40
Safe UDL **kg	2372	1579	1186	784	583	462	380

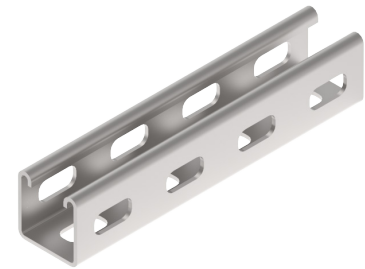

Back To Back Deep Channel Triple Slotted

Part Code	Length (m)	Finish
UC4182T/3	3	Galvanized to BS EN10346
UC4182T/6	6	Galvanized to BS EN10346
GMUC4182T/3	3	Hot Dipped to BS EN ISO 1461
GMUC4182T/6	6	Hot Dipped to BS EN ISO 1461

Span (m)	0.50	0.75	1.00	1.50	2.00	2.50	3.00
Deflection at load *mm	0.50	1.10	2.00	4.60	8.20	12.80	18.40
Safe UDL **kg	2372	1579	1186	784	583	462	380



QuickFix Trunking

QuickFix Multi Compartment Trunking

Lighting Trunking

Uniklip Cable Tray

Speedway Cable Ladder Pre-Galv. Cable Ladder

Cable Basket

Channel & Support

Floor Trunking

Bench Outlet & Perimeter Trunking

Steel Conduit (Class 4)

Innovative Design Solutions

Accessories & Supports

Index