

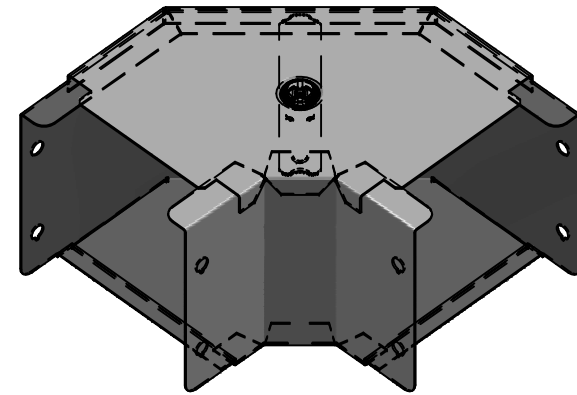


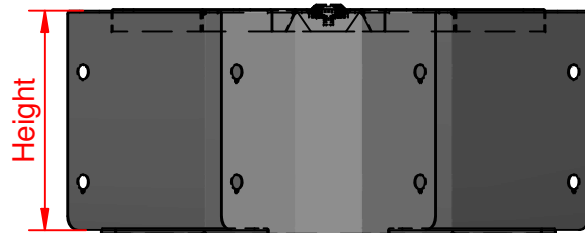


QuickFix

Size	Width	Height
GTB22	50.8	50.8
GTB32	76.2	50.8
GTB33	76.2	76.2
GTB42	101.6	50.8
GTB43	101.6	76.2
GTB44	101.6	101.6
GTB62	152.4	50.8
GTB63	152.4	76.2
GTB64	152.4	101.6
GTB66	152.4	152.4
GTB82	203.2	50.8
GTB83	203.2	76.2
GTB84	203.2	101.6
GTB88	203.2	203.2
GTB92	228.6	50.8
GTB93	228.6	76.2
GTB94	228.6	101.6
GTB96	228.6	152.4
GTB99	228.6	228.6

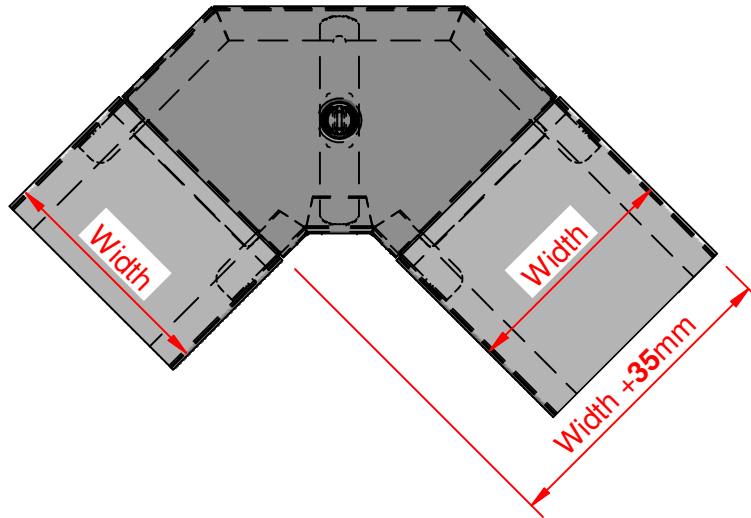

- ✓ Fast fitting **UniBolt** reduces installation time by as much as 80%
- ✓ **IP4X compliant** as standard
- ✓ **Completes the range** of fast fitting and innovative Cable Management Solutions

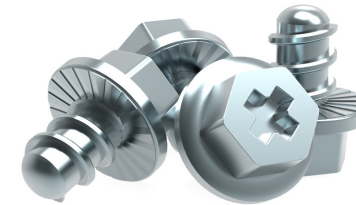

In accordance with Unitrunk's policy of continuous improvement, Unitrunk reserves the right to change specifications and designs without notice. Data is the copyright of Unitrunk Ltd and not to be reproduced or passed to a third party without written consent.

Cable Trunking & Ducting Standard BS EN 50085-1 & BS EN 50085-2-1	Material Standard BS EN 10346 (Pre Galv)		Quality Recognition	
	Unitrunk Head Office: 4 Altona Road, Lisburn, BT27 5QB +44 28 9262 5100 info@unitrunk.co.uk unitrunk.co.uk unitrunk.ie	Lid Fixing Retained Toggle	Torque Value 3 N m	
	Data Sheet Reference Gusset Bend Top Lid	Revision 2.01		



UNITRUNK